



Product designation				Time relay
Product type designation				TMM2
Number of DIN modules				1
<b>General characteristics</b>				
Description				Multifunction time relay, multiscale and multivoltage, 2 relay outputs
Function				Multifunction
<b>Supply circuit</b>				
Rated auxiliary supply voltage $U_s$				12...240VAC/DC
Rated auxiliary supply voltage $U_s$ AC	min	VAC	12	
		Max	VAC 240	
	DC	min	VDC 12	
		Max	VDC 240	
Rated frequency			Hz 50/60	
Operating voltage range				0.85...1.1 $U_s$
Maximum power consumption / dissipation			W	1.1VA/0.8W (12...48VAC/DC), 1.8VA/1.2W (110...240VAC/DC)
Immunity time for microbreakings			ms	≤15
<b>Timing circuit</b>				
Time setting range				0.1s...10days
Setting accuracy			%	<±9
Repeat accuracy			%	<±0.2
Influence of voltage variation			%	<±0.1
Influence of temperature variation			%	<±0.2
External command input	Minimum ON time	ms	25	
	Connenction time		permanent	
Resetting time	During timing	ms	≥100	
	Elapsed time	ms	≥50	
<b>Relay outputs</b>				
Number of relays				Nr. 2
Contact arrangement				1 inst./delayed N/O + 1 delayed C/O
Maximum switching voltage			VAC	250
IEC Conventional free air thermal current $I_{th}$			A	8
UL/CSA and IEC/EN 60947-5-1 designation				B300
<b>Insulation (input-output)</b>				

Rated insulation voltage $U_i$	V	250
Rated impulse withstand voltage $U_{imp}$	kV	4
Power frequency withstand voltage	kV	2

### Connections

Terminals type	Screw		
Tightening torque (Max)	Tightening torque Max	Nm	0.8
	Tightening torque Max	Ibin	7 / 7...9 UL

Conductor section	AWG/Kcmil	min	24...12	
		max	12...18	
	IEC	min	mm <sup>2</sup>	0.2
		max	mm <sup>2</sup>	4

### Operations

Mechanical life	cycles	30000000
Electrical life (with rated load)	cycles	100000


### Ambient conditions

Temperature	Operating temperature	min	°C	-20
		max	°C	+60
	Storage temperature	min	°C	-30
		max	°C	+80
Relative humidity		%	<90%	
Maximum Pollution degree			2	
Overvoltage category			III	


### Housing

Execution (n° of modules)	1		
Material	Self-extinguishing polyamide		
Mounting	DIN rail 35 mm		
Degree of protection	IP40 on front, IP20 terminals		
Dimensions (W x H x D)	mm	17.5 x 104.7 x 64.9	
Weight	g	94	


### Dimensions

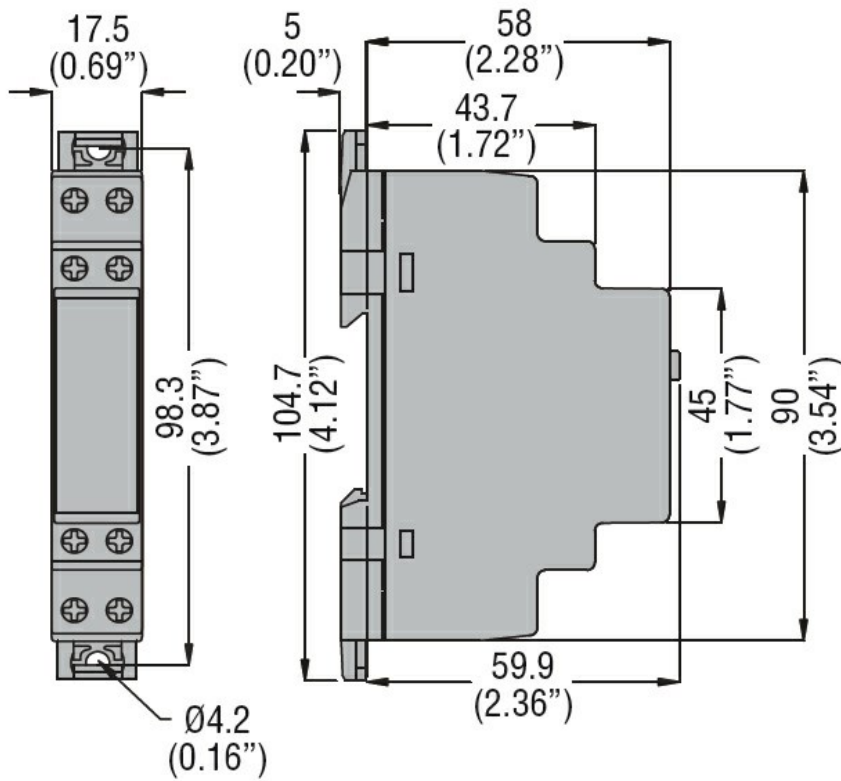

### Wiring diagrams



With instantaneous  
operation programmed



With delayed  
operation programmed



### Certifications and compliance

#### Compliance

CSA C22.2 n°14

IEC/EN 61812-1

UL508

#### Certificates

cULus

EAC

### ETIM classification

ETIM 8.0

EC001439 -  
Timer relay