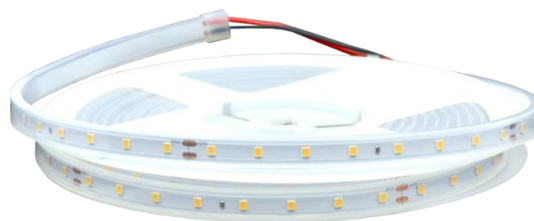


KANO LED STRIP

TECHNICAL SPECIFICATION
KANO130_4.8W_64LED_IP_3K_624

Flexible LED strip DC24V. 2 OZ PCB. 3M tape.
IP67. SAMSUNG SMD2835 LED chips.
5000mm roll. Complete with 3000K LED's


IP67
130 lm/W

TECHNICAL DATA		Product code	600100003
Electrical data			
Nominal wattage	4.8 W/m		
Nominal Voltage	24 V		
Power factor	≥0.50		
Mains frequency	50/60 Hz		
Photometrical data			
Color temperature (CCT)	3000 K		
Luminous efficiency	130 lm/W		
Luminous flux	624 lm		
Color rendering index (CRI)	≥90		
Unified Glare Rating (UGR)	<21,5		
Flicker index	Flicker-Free		
Dimensions and weight			
Dimension	50000x12x4 mm		
Weight Neto	0,16 kg		
Operating conditions			
Ambient temperature range	-20...+65°C		
Lifespan			
Lifespan L80/B10 at 25°	50000 h		
Led Brand	SAMSUNG SMD2835		
Standards and Certificates			
Type of protection IP	IP67		
Standards	CE, RoHS		
Warranty	60 months		
LOGISTICAL DATA			
Main package			
Product code	600100003		
Package	Carton box		
Units in carton	1 pcs		
Package diameters, weight bruto	240x210x13 mm ; 0,21 kg		
Product EAN code	4772007011186		

Second package

Package	Carton box
Units in second package	25 pcs
Package diameters, weight bruto	335x210x245 mm ; 5,582 kg
ShipPing carton EAN code	4772007011568

ACCESSORIES

ENERGY EFFICIENCY

