



**Wall-Mounted EcoMax G2**

- Stylish, compact and sturdy wall mounted fixture (IP54+IK08)
- Easy wiring with through-wiring possibility
- Integrated CCT switch for color selection (3000K-4000K)



**Specifications**

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	With sensor	Weight (kg/pc)
Motion Detection, Daylight Detection								
522020001500	LEDWall-Mounted-E2 Rd275-22W-MD	CFL 2x26W	22	2500	115	3000/4000	Yes	0.76

**Packaging Information**

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
522020001500	LEDWall-Mounted-E2 Rd275-22W-MD	94051190	285x285x80	1.04	6941408884165	1

Technical Specifications	
Lifetime (L70)	50,000 h
Lifetime (L80)	30,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	Sensor controlled (MD)
Sensor type	Motion + Daylight detection (MD)
Sensor technology	Microwave (MW)
Finishing	White RAL9016
Colour rendering index (CRI)	≥ 80
Degree of protection (IP)	IP54
Impact strength	IK08
Protection class	II
With control gear	Yes
Glow wire test	850°C
Power factor	≥ 0.9

Electrical Supply	
Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	No

Mechanical Properties	
Housing material	Polypropylene (PP)
Optical material	Polypropylene (PP)

Ambient Conditions	
Operating temperature	-20-+45°C
Operating temperature EM	n/a
Application temperature	+25°C
Storage environment	-30-+60°C
Storage environment EM	n/a



**ENERGY**


OPPLE Lighting  
522020001500

**22**  
kWh/1000h


2019/2015

## Dimensional Drawing (mm)


LEDWall-Mounted-E2 Rd275

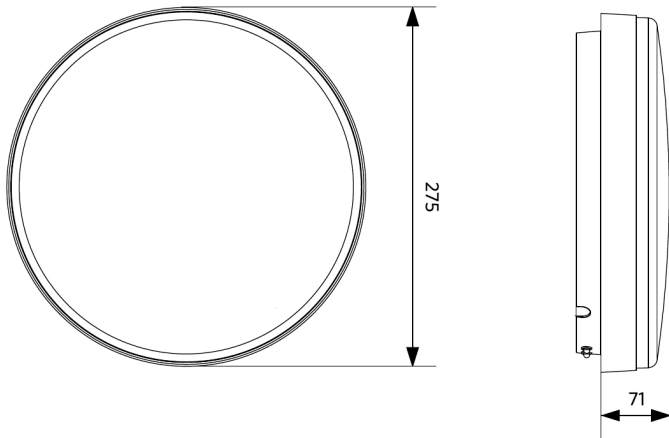

## Photometric Data

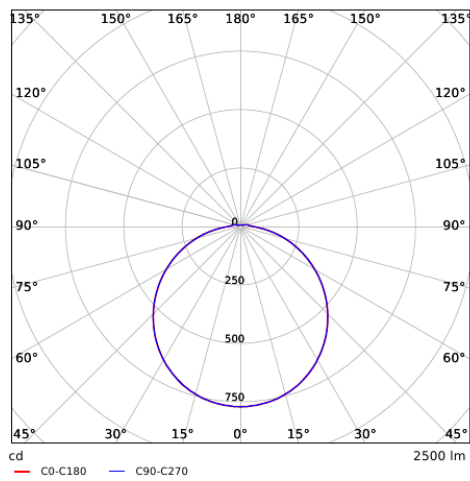

## Motion sensors - Detection range

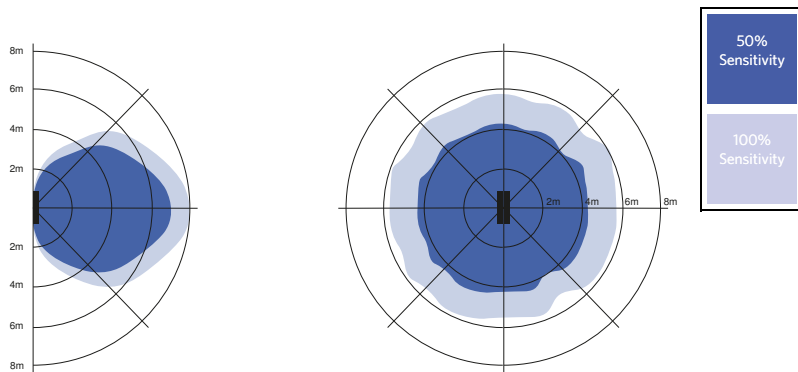

Installation - Wall mounted  
Suggested installation height 1-3m

Installation - Ceiling mounted  
Suggested installation height 2.5-6m