

## START Surface IP44 DualTone

START Surface IP44 1550lm 830/840 DualTone

0043427



### Product features

- Ceiling / wall luminaire with integrated LED. Perfect solution for hallways, circulation spaces or foyer. Even and uniform light distribution with a halo lighting effect on the wall surface. Body Size diameter 330mm. Besa mounting box compatible, hole distance 51mm. DualTone functionality enables switch between 3000K and 4000K colour temperatures. Power 18W, output 1550 lumens (4000K). Non-dimmable. IK03, IP44. Low maintenance with lifespan 90,000 hours L70:B50.



### NOTES

undefined

### PRODUCT OVERVIEW

Product name	START Surface IP44 1550lm 830/840 DualTone
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
General application	Hospitality
ETIM Class	EC002892
E-number FI	4170570
Warranty	3 years
Fixture luminous flux (lm)	1550
Luminaire efficacy (lm/W)	85
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	120
Photobiological Risk Group	RG0
Total power consumption (W)	18
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	High (>40%)
Housing colour	White
IP rating	IP44
IK rating	IK03
Product EAN number	5410288434278

## START Surface IP44 DualTone

*START Surface IP44 1550lm 830/840 DualTone*

0043427

### DATA TABLE

#### General data

Product name	START Surface IP44 1550lm 830/840 DualTone
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
General application	Hospitality
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4170570
Warranty	3 years

#### Optical data

Fixture luminous flux (lm)	1550
Luminaire efficacy (lm/W)	85
Correlated colour temperature range (K)	3000 - 4000
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	120
Distribution type	Diffuse
Photobiological Risk Group	RG0

#### Electrical data

Total power consumption (W)	18
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.8
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	70
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	57
Inrush Current (A)	0.5
Inrush Duration (µs)	30
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	High (>40%)
Max. products per 10A C Breaker	39
Max. products per 13A C Breaker	51
Max. products per 16A C Breaker	62

## START Surface IP44 DualTone

*START Surface IP44 1550lm 830/840 DualTone*

0043427

Max. products per 20A C Breaker	78
Max. products per 10A B Breaker	36
Max. products per 13A B Breaker	47
Max. products per 16A B Breaker	58
Max. products per 20A B Breaker	72
Connectable conductor cross section - Max (mm <sup>2</sup> )	2.5

### Lifetime data

Lifespan L70 B50	90000
Lifespan L80 B50	90000
Lifespan L90 B50	45000

### Physical data

Housing colour	White
IP rating	IP44
IK rating	IK03
Diffuser finish	Opal
Diffuser material	Polypropylene
Nominal Product Height (mm)	96
Nominal Product Diameter (mm)	330
Weight (kg)	0.516

### Packaging

Single packaging type	Carton
Product EAN number	5410288434278
Packaging single length / height (cm)	33.6
Packaging single width (cm)	9.9
Packaging single depth (cm)	33.5
DUN14 (outer)	15410288434275
Units per outer package	6
Packaging outer length / height (cm)	64.4
Packaging outer width (cm)	38.5
Packaging outer depth (cm)	38.2

### Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

## PHOTOMETRY


## START Surface IP44 DualTone

START Surface IP44 1550lm 830/840 DualTone  
0043427

0.5	1.69 1.69	E(0°) E(C90) E(C180)	1673 151 110
1.0	3.37 3.38	E(0°) E(C90) E(C180)	418 28 28
1.5	5.05 5.07	E(0°) E(C90) E(C180)	198 12 12
2.0	6.74 6.76	E(0°) E(C90) E(C180)	108 7 7
2.5	8.42 8.45	E(0°) E(C90) E(C180)	67 4 4
3.0	10.11 10.15	E(0°) E(C90) E(C180)	46 3 3

Distance [m]      Cone diameter [m]      Illuminance [lx]


— C0 - C180 (Half beam angle: 118.8°)  
— C90 - C270 (Half beam angle: 118.8°)

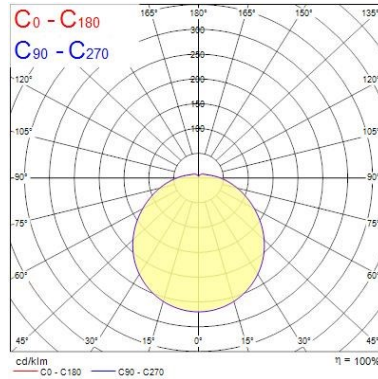

0.5	1.69 1.69	E(0°) E(C90) E(C180)	1538 102 102
1.0	3.37 3.38	E(0°) E(C90) E(C180)	384 28 28
1.5	5.05 5.07	E(0°) E(C90) E(C180)	171 11 11
2.0	6.74 6.76	E(0°) E(C90) E(C180)	96 6 6
2.5	8.42 8.45	E(0°) E(C90) E(C180)	62 4 4
3.0	10.11 10.15	E(0°) E(C90) E(C180)	43 3 3

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 118.8°)  
— C90 - C270 (Half beam angle: 118.8°)

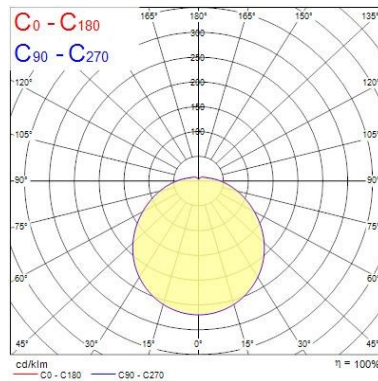

## TECHNICAL DRAWINGS

